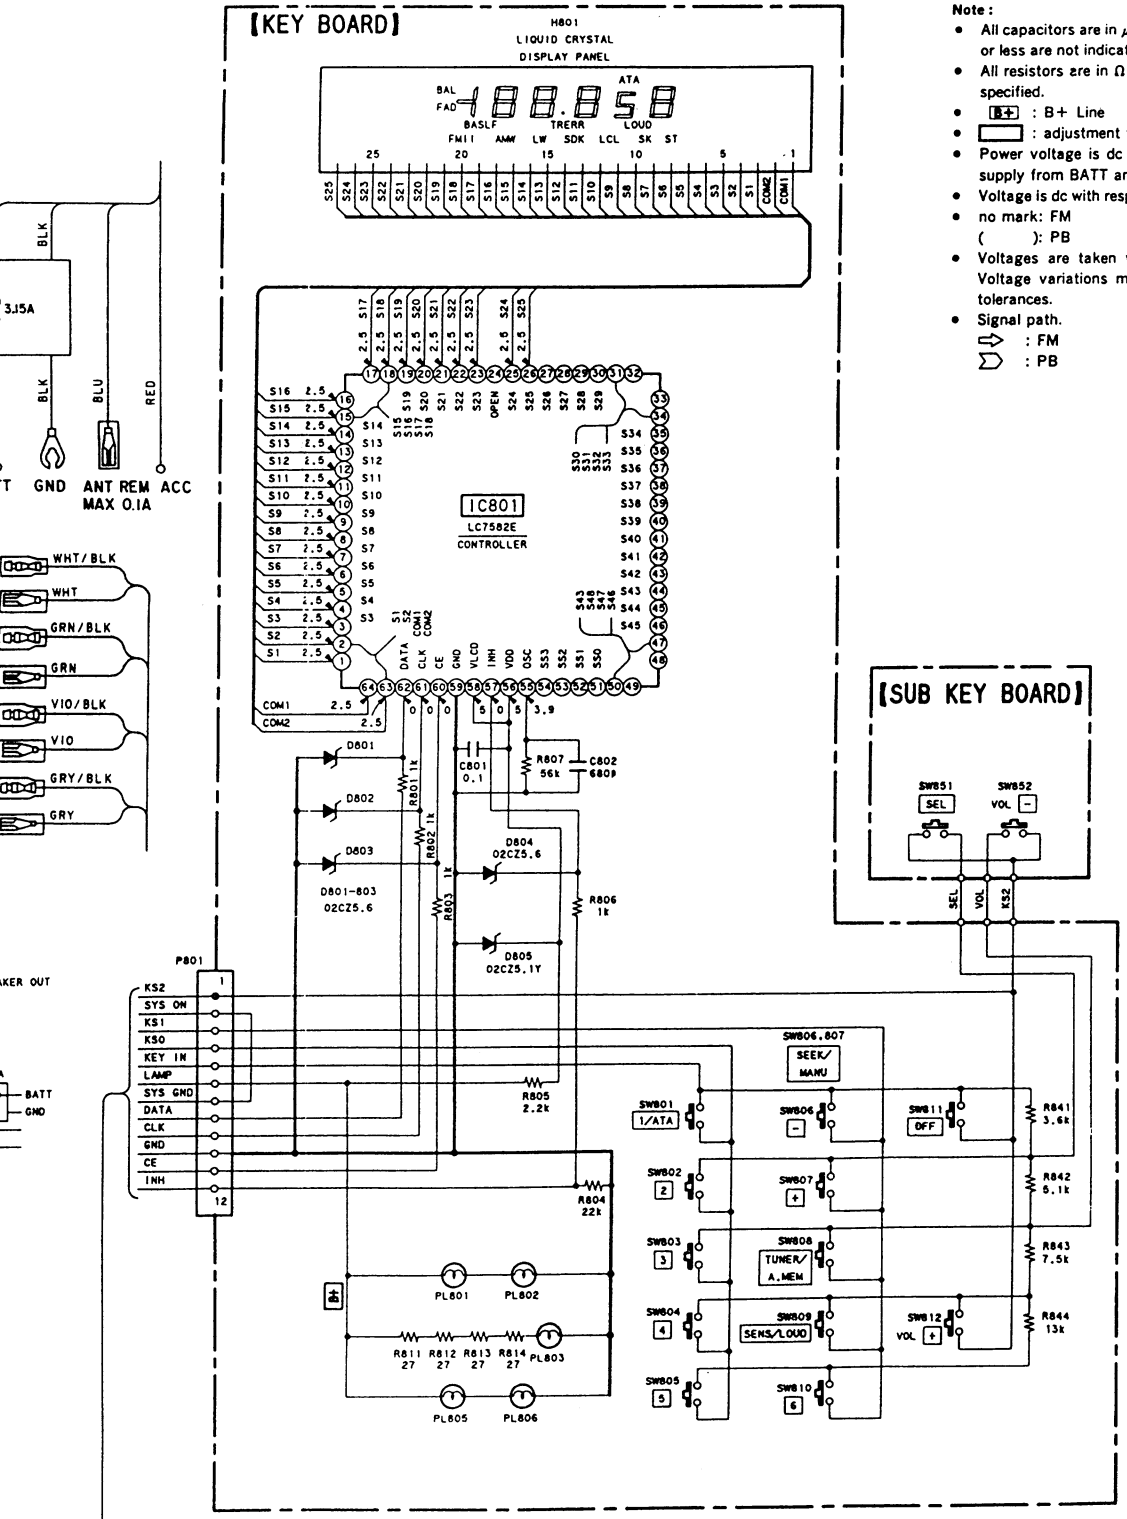

Note :

- All capacitors are in μF unless otherwise noted. pF : $\mu\mu$F 50W or less are not indicated except for electrolytics and tantalums
- All resistors are in Ω and 1/4 W or less unless otherwise specified.
- B+ : B+ Line
- : adjustment for repair.
- Power voltage is dc 14.4V and fed with regulated dc power supply from BATT and ACC terminals.
- Voltage is dc with respect to ground under no-signal conditions.
- no mark: FM
  ( ): PB
- Voltages are taken with a VOM (Input Impedance 10MΩ). Voltage variations may be noted due to normal production tolerances.
- Signal path.
  ⇨ : FM
  ⇨ : PB